

DIRECT VENT
GAS FIREPLACES

SAVANNAH

Quality is in the Flame



OD2000



Shown With Basic Stainless Surround



Shown With Basic Stainless Weather Cover



No Surround





Finish up to edge



Model	BTU's		Vent	Height		Width		Depth	
	Natural Gas	Propane		Actual	Framing	Actual	Framing	Actual	Framing
OD2000	Hi 40,000	32,500	Ventless	25"	31"	43-1/8"	47-3/8"	14"	16"
	Lo 29,000	24,000							

*CERTIFIED for wood Framing
 Dim:31"H x 47-3/8"W x 16"D
 Internal Ceiling = Min 48"
 Mantle Height = 42"

The minimum clearance to combustibles are as follows:

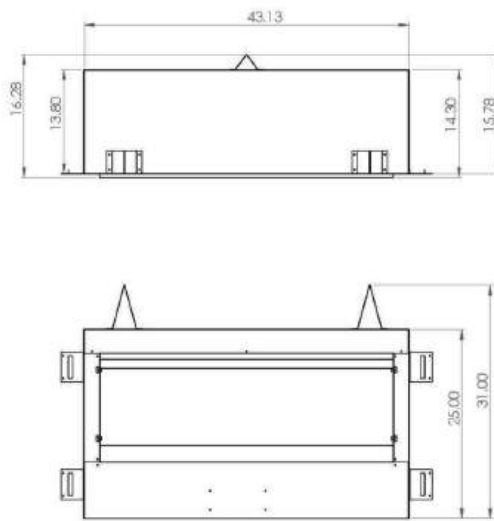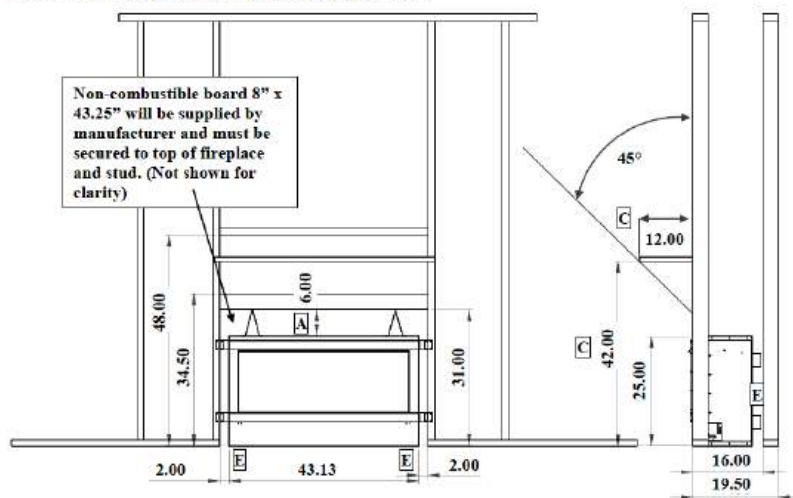

Features

- Linear Design
- True Clean Face
- All Stainless Steel
- Crisscross Stainless steel Bruner

- Remote Control
- Electronic Ignition
- Cover With Kill Switch
- 100% Safety Shut Off
- NG or LP

Options

- DWLS/7pcs log set
- Ceramic Stones

